

Hinge Replacement Instructions

This sheet is to help in the replacement of your Hinge Brackets

Tools needed: A 3/16" socket with wrench, Phillips screwdriver and a 1/4" Allen wrench

UNPLUG UNIT AND DISCONNECT CANOPY FROM BENCH

- Reverse the assembly of the canopy to the hinge per your manual. Remove the gas springs, the 1 1/2" bolt and nylon washer that attach the canopy (top) to the hinge. With help remove the canopy and set aside.
- Remove both hinges from the bench using a 1/4" Allen wrench.
- Using a Phillips screwdriver, remove the top screw of the Endcap on the back side of the bench (note figure below where the post is shown) and replace it with one of the HINGE POSTS that came with the kit. Repeat on the other Endcap.
- You should now have one Hinge Post on the head end and foot end of the unit.
- Place both new Hinge Brackets on the bench per your manual.
- *The Hinge Bracket will fit onto and over the Hinge Post.*

Replace canopy and gas springs per your manual.

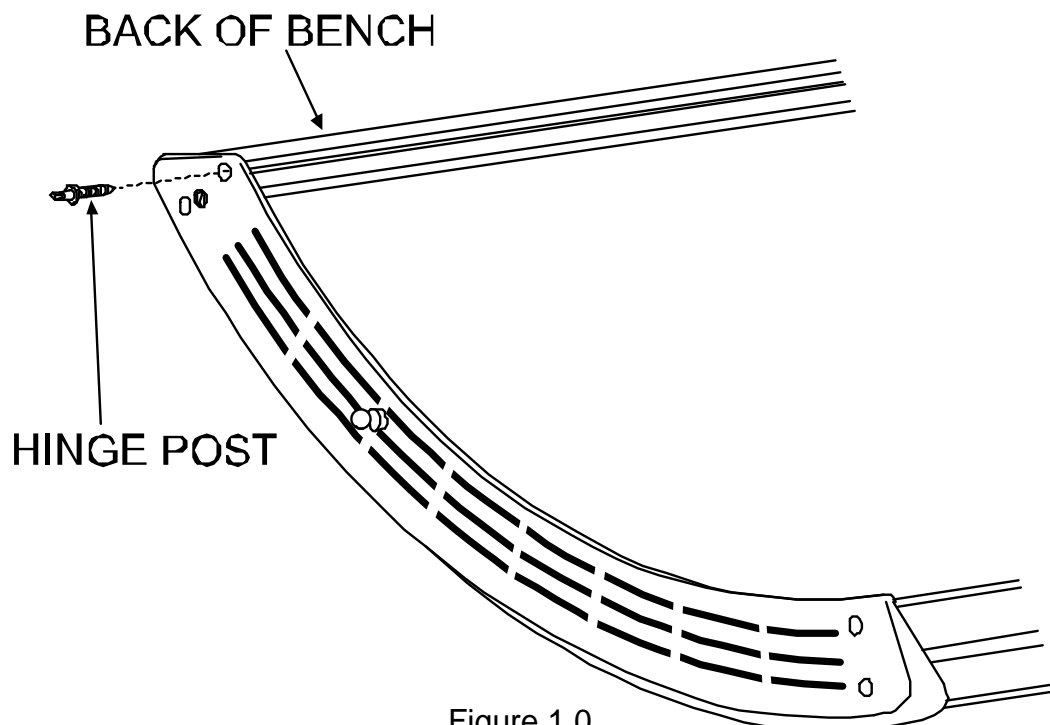


Figure 1.0