

# 756V / 652V


	<b>WARNING</b>
	Shock hazard. Disconnect power before removing any protective covers.

## *Replacing an Old Timer with a New Timer*

---


---

**Disconnect power from the unit.** Open the Right Module acrylic (or grill) and remove the lamps (refer to the User Manual for instructions). Six screws hold two reflector panels behind the lamps. Remove the reflector panels to reveal the timer inside the unit. Before touching the timer, be sure to touch bare metal within the booth cabinet to ground yourself. Failure to do so may damage the timer and other sensitive components. Remove the four screws holding the timer to the booth and disconnect all wire harnesses. Make a note of where each wire harness attaches to before disconnecting from the old timer in order to alleviate installation issues of the new timer.

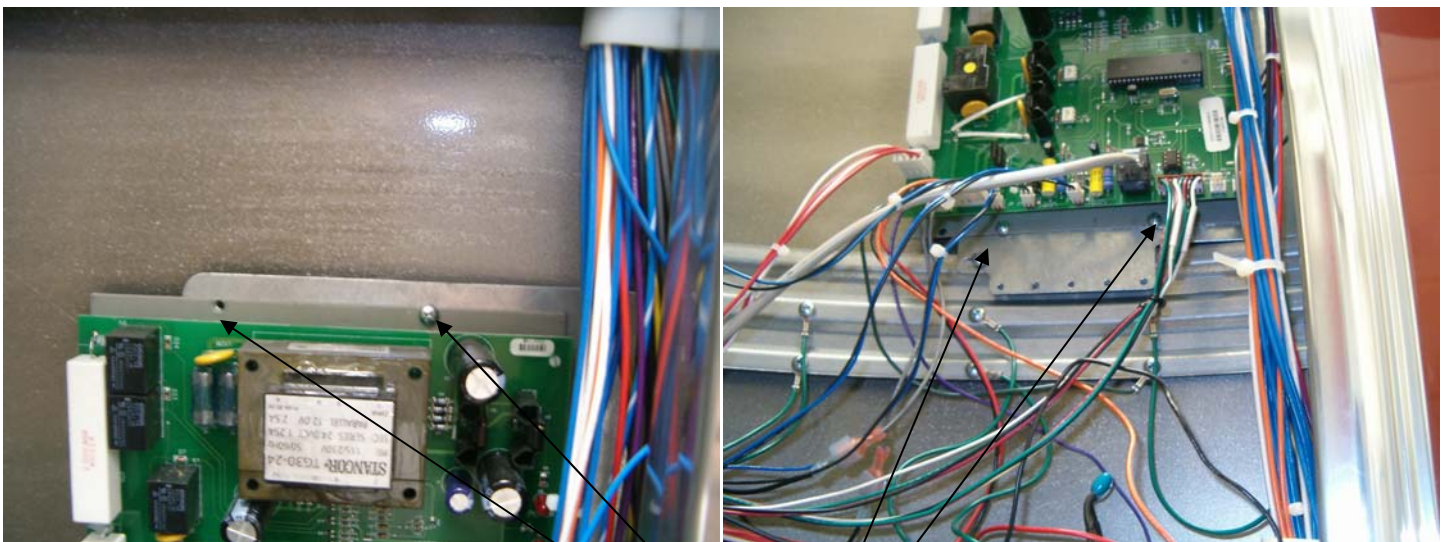




REMOVE THE FOUR SCREWS AND DISCONNECT THE WIRE HARNESSSES AND REMOVE THE TIMER. THE INSTALLATION IS THE REVERSAL OF THE REMOVAL.

REMOVE THE T-MAX  
WIRE HARNESSSES  
FROM OLD THE  
TIMER.

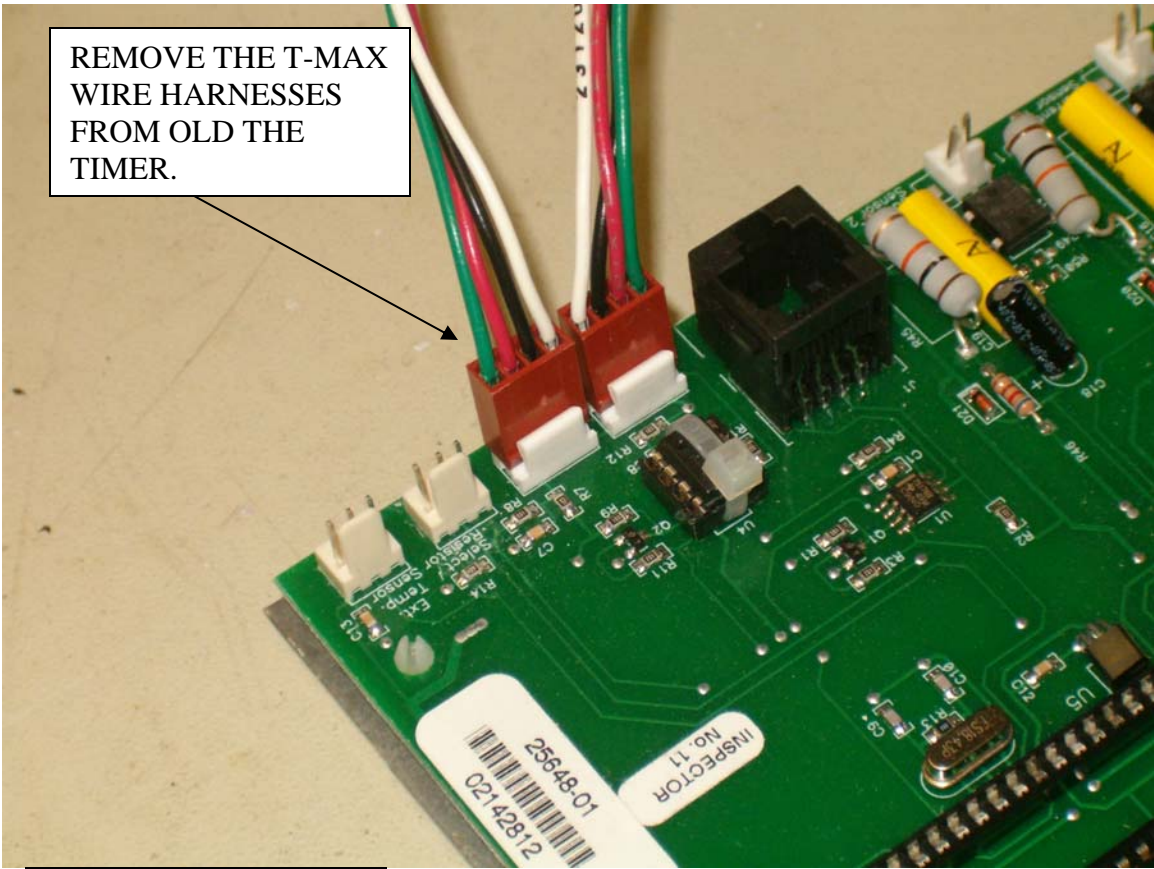

INSTALL THE T-MAX  
WIRE HARNESSSES  
ON THE FAR OUTER  
PINS LEAVING TWO  
PINS EXPOSED IN  
THE MIDDLE AS  
SHOWN ON THIS  
NEW TIMER

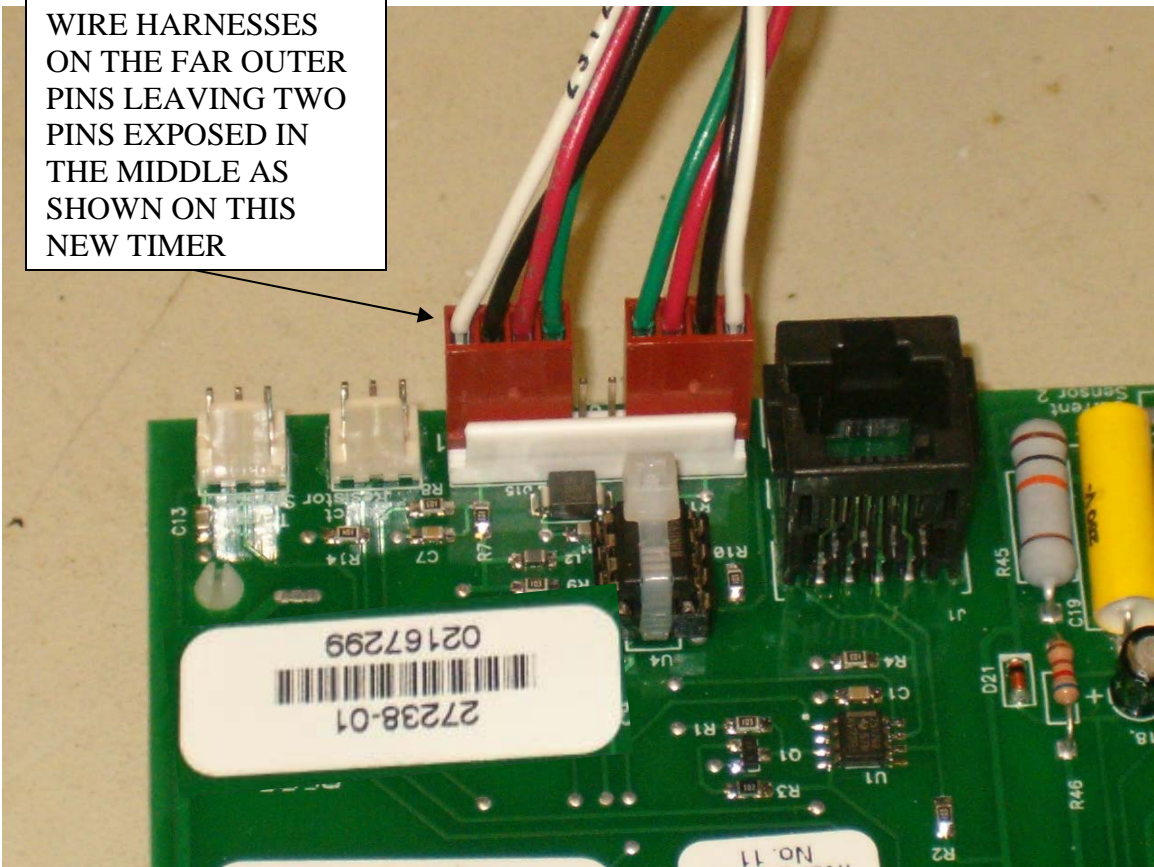

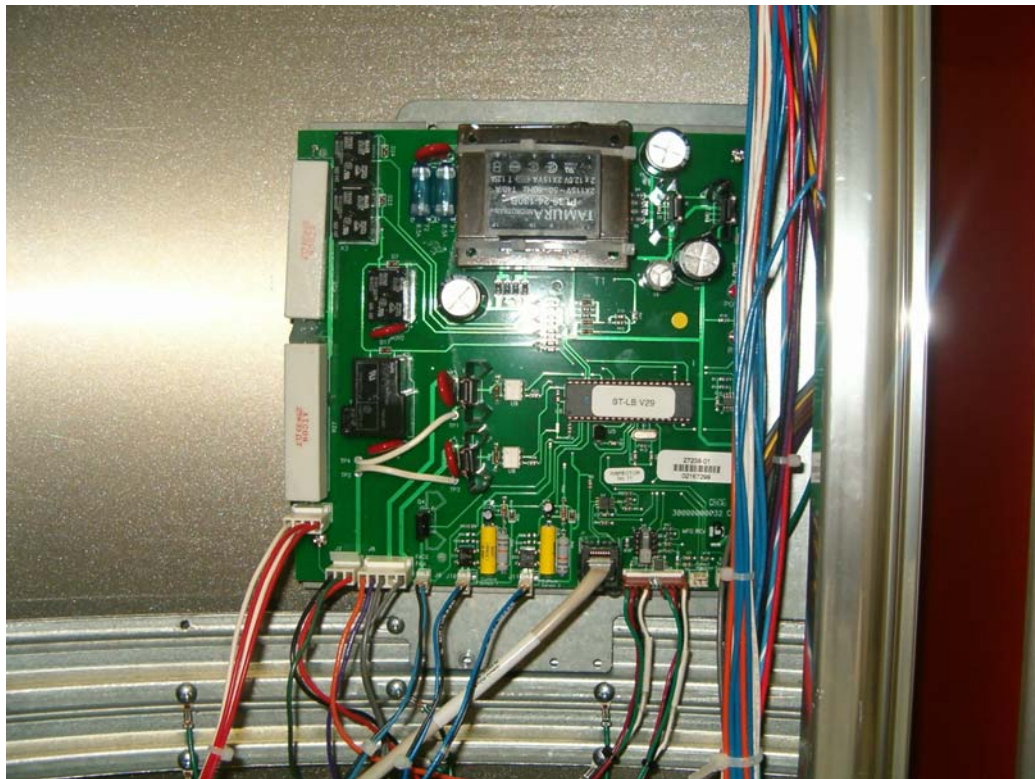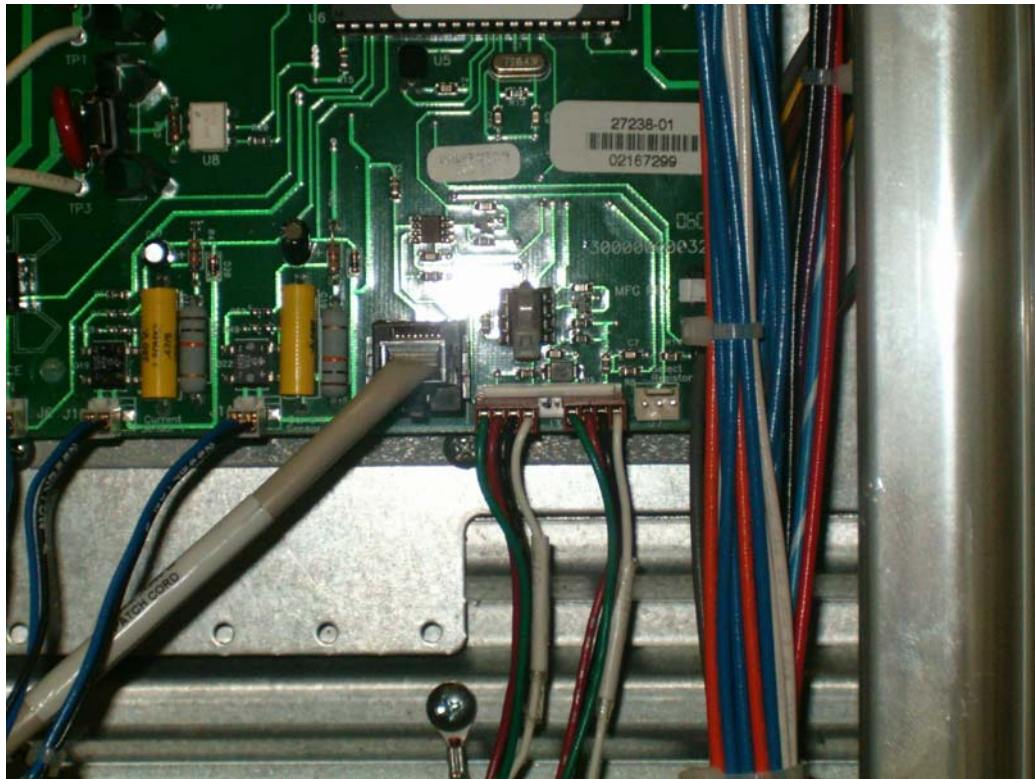

THE FINISH INSTALLATION SHOULD  
LOOK LIKE THE ABOVE PICTURE.