

30321-01, REV A
442-3F TIMER BOX

BED
FRONT

BED
BACK

PINS
1-12, 14, 15

TO CONTACTOR BOX

FROM CONTACTOR BOX

TO CONTACTOR BOX

FROM CONTACTOR BOX

FROM CONTACTOR BOX

FROM CONTACTOR BOX

RJ-45 8P8C 3ft

RJ-45 8P8C 12ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

PINS
1,2, 4,5, 7,8
BLK BLK BLK
BLU BLU BLU
L1 L2 L3

PINS 3,6,9

RED

RED

RJ-45 8P8C 12ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 3ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 12ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 3ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 12ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 3ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 12ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 3ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 12ft

TO DISPLAY

OR OPTIONAL PYTHON AMP USING 28192-01

RJ-45 8P8C 3ft

30323-01, REV A





442-3F BENCH

<---HEAD END

FOOT END--->

LAMP HOLDER INTERNALLY SHUNTED W/O SPRING 29590-01 (14)



LAMP HOLDER INTERNALLY SHUNTED W/SPRING 29592-01 (14)

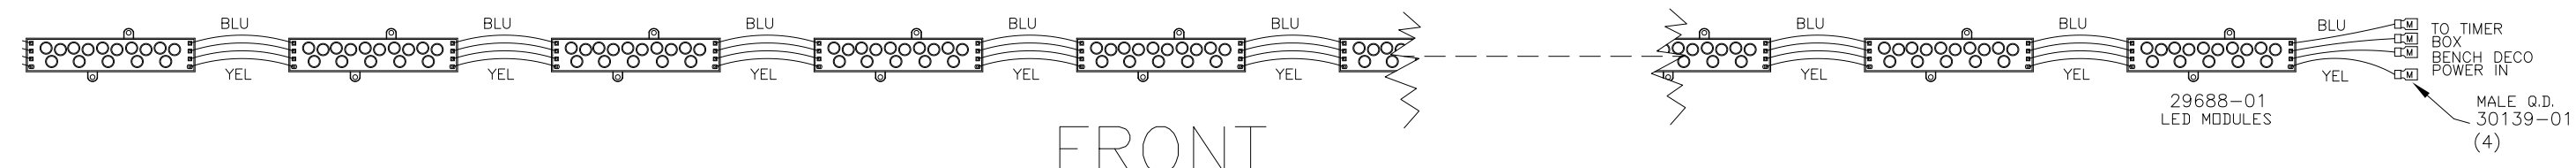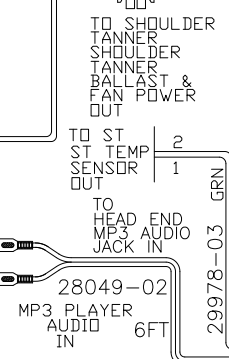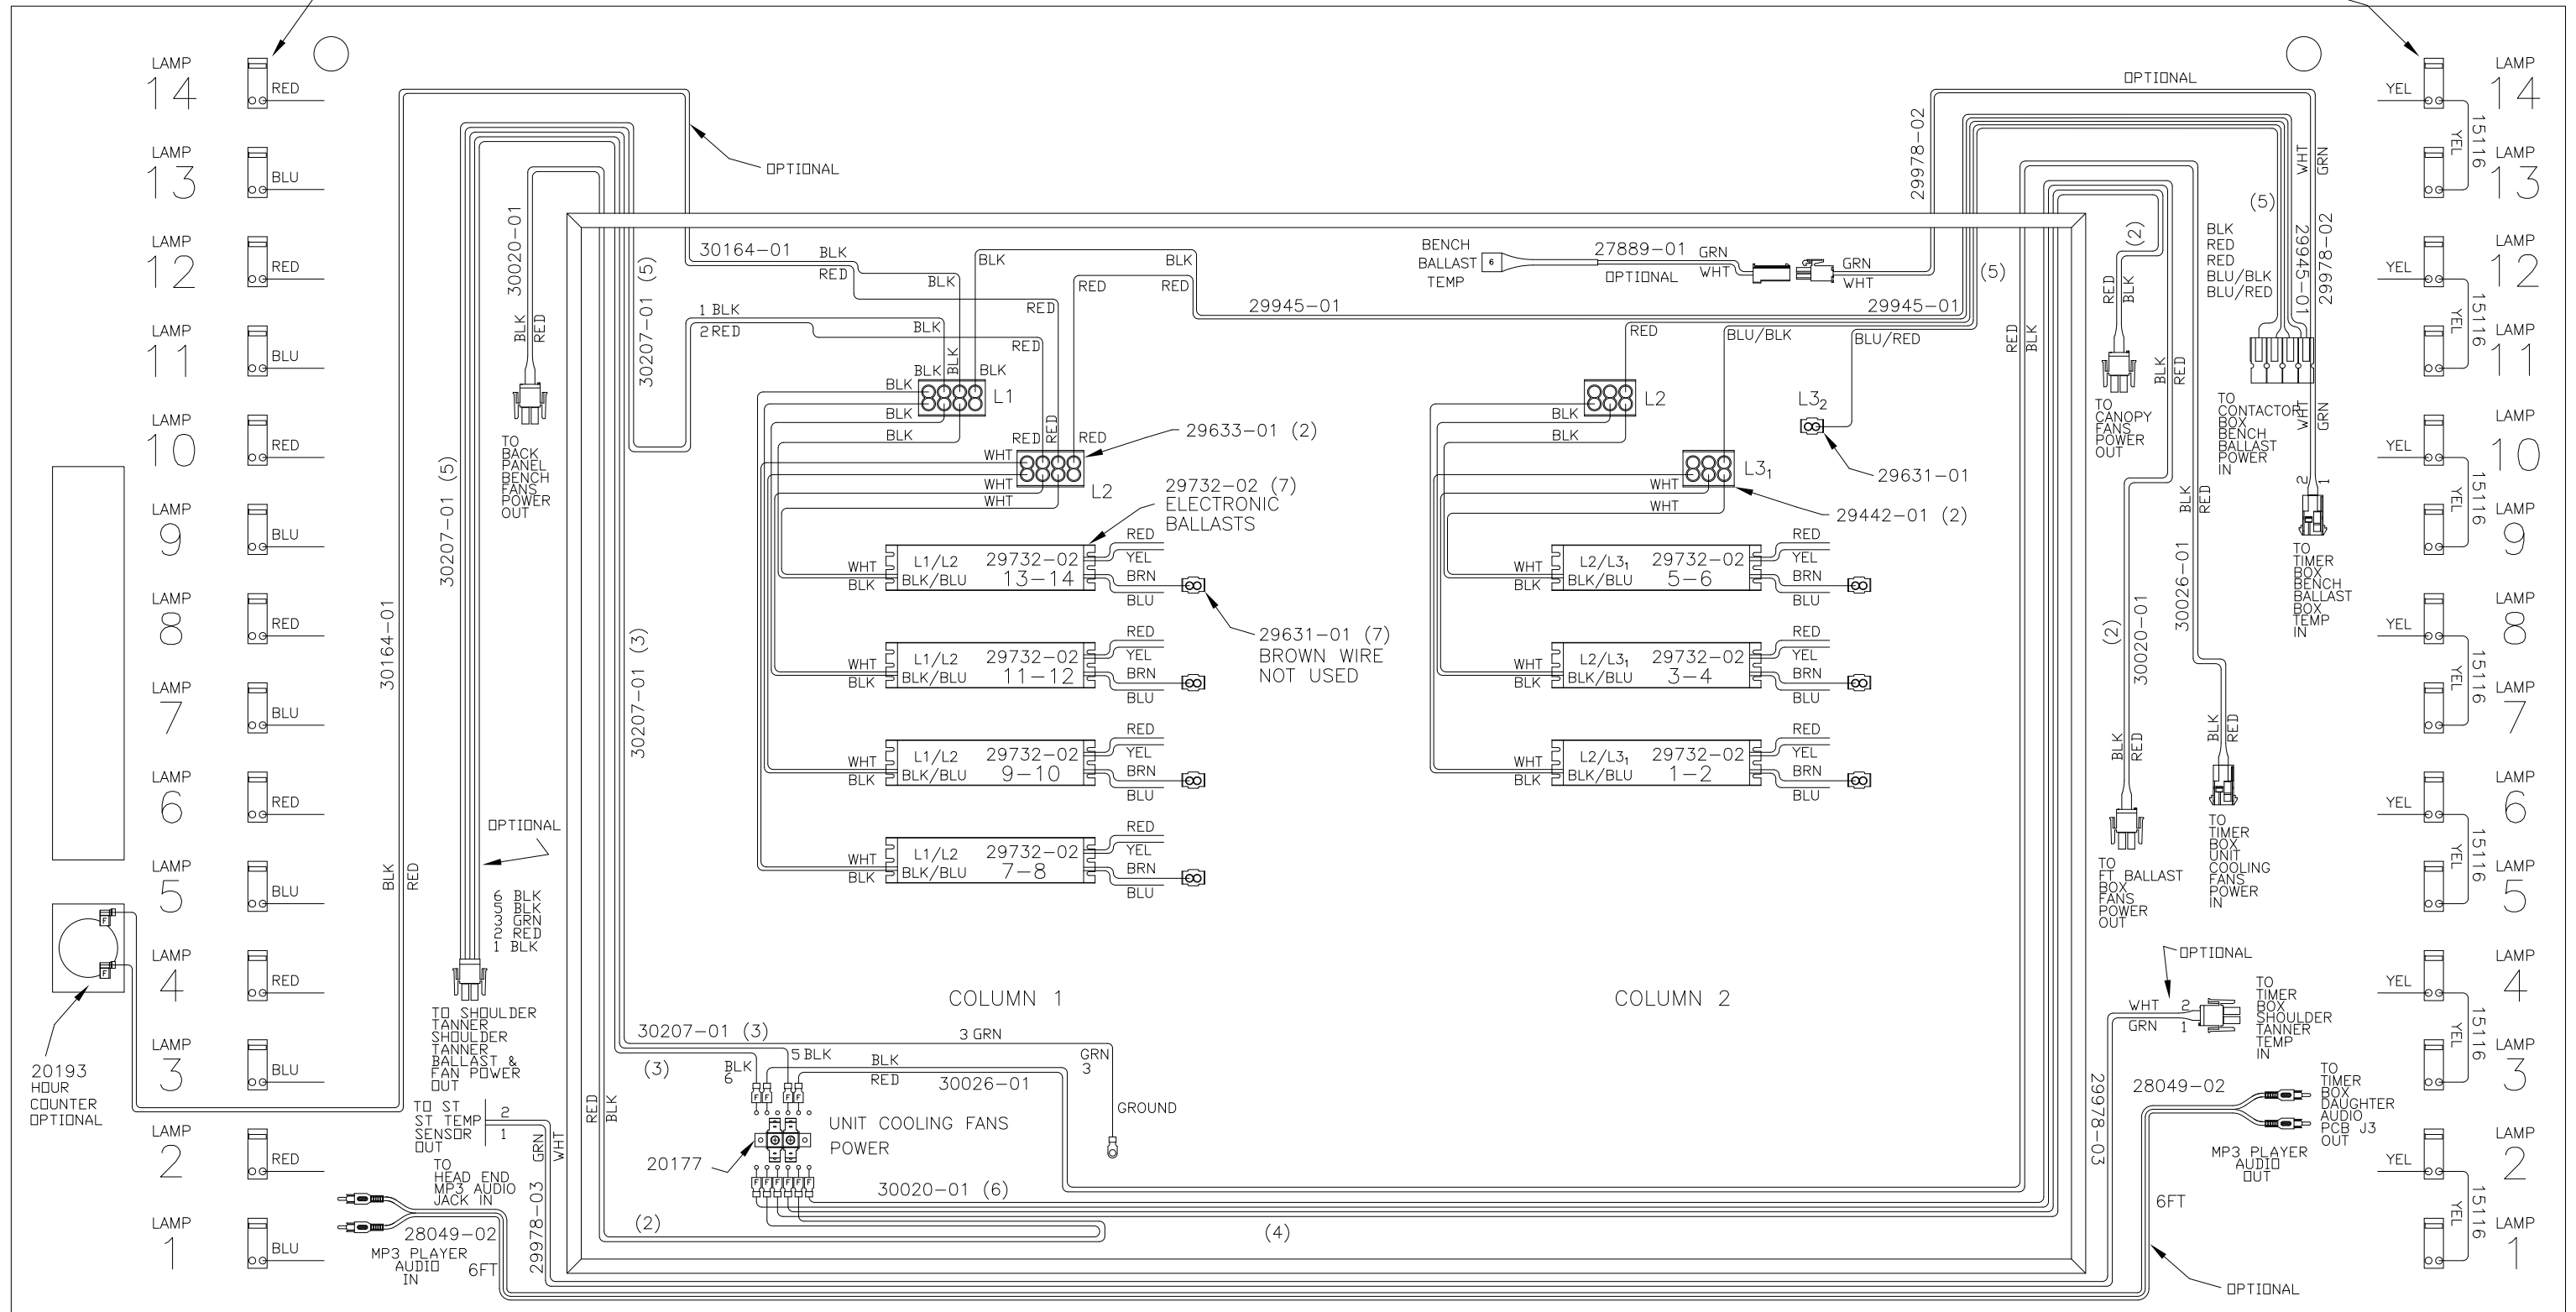

MAIN TIMER BOARD WITH THE
AUDIO BOARD OPTION

30324-01, REV A
442-3F TIMER
PCB

MAIN TIMER BOARD WITHOUT
THE AUDIO BOARD OPTION

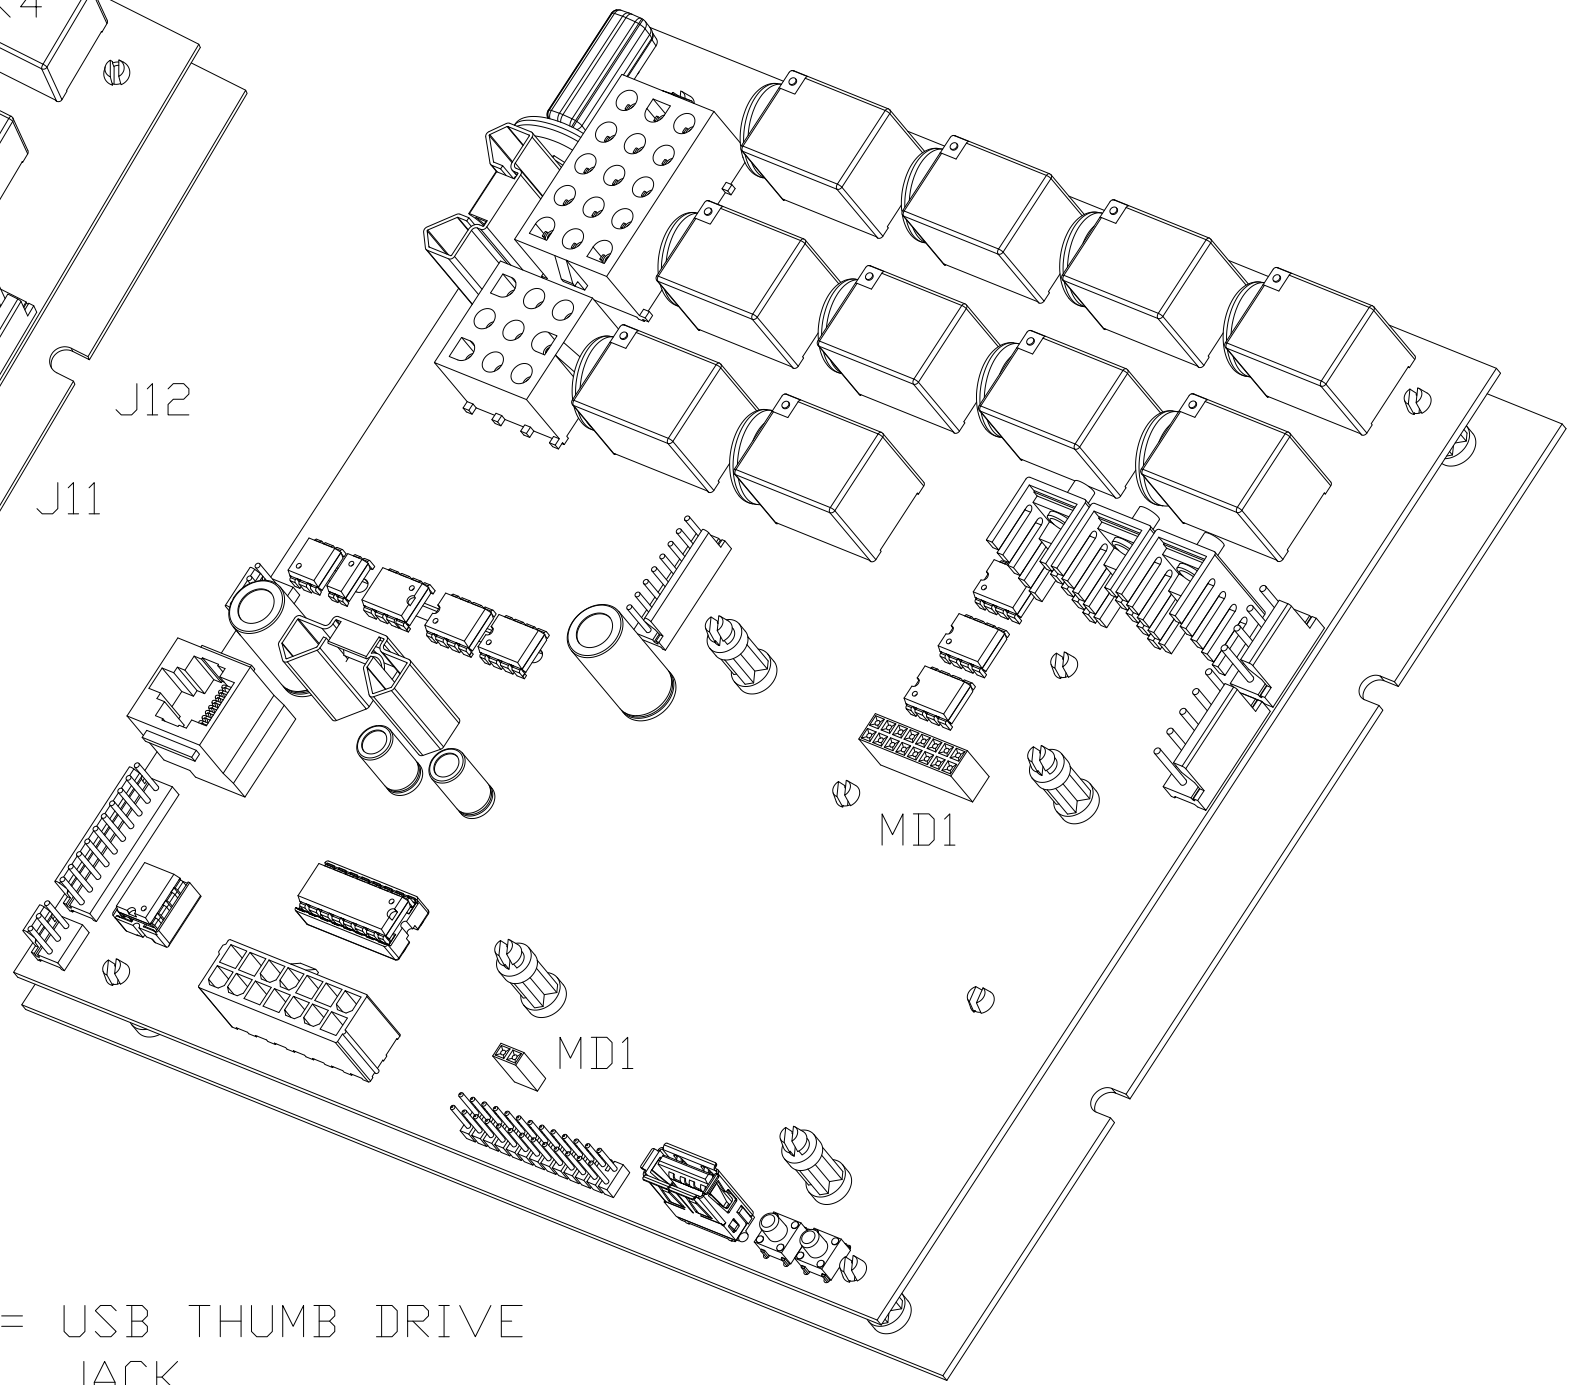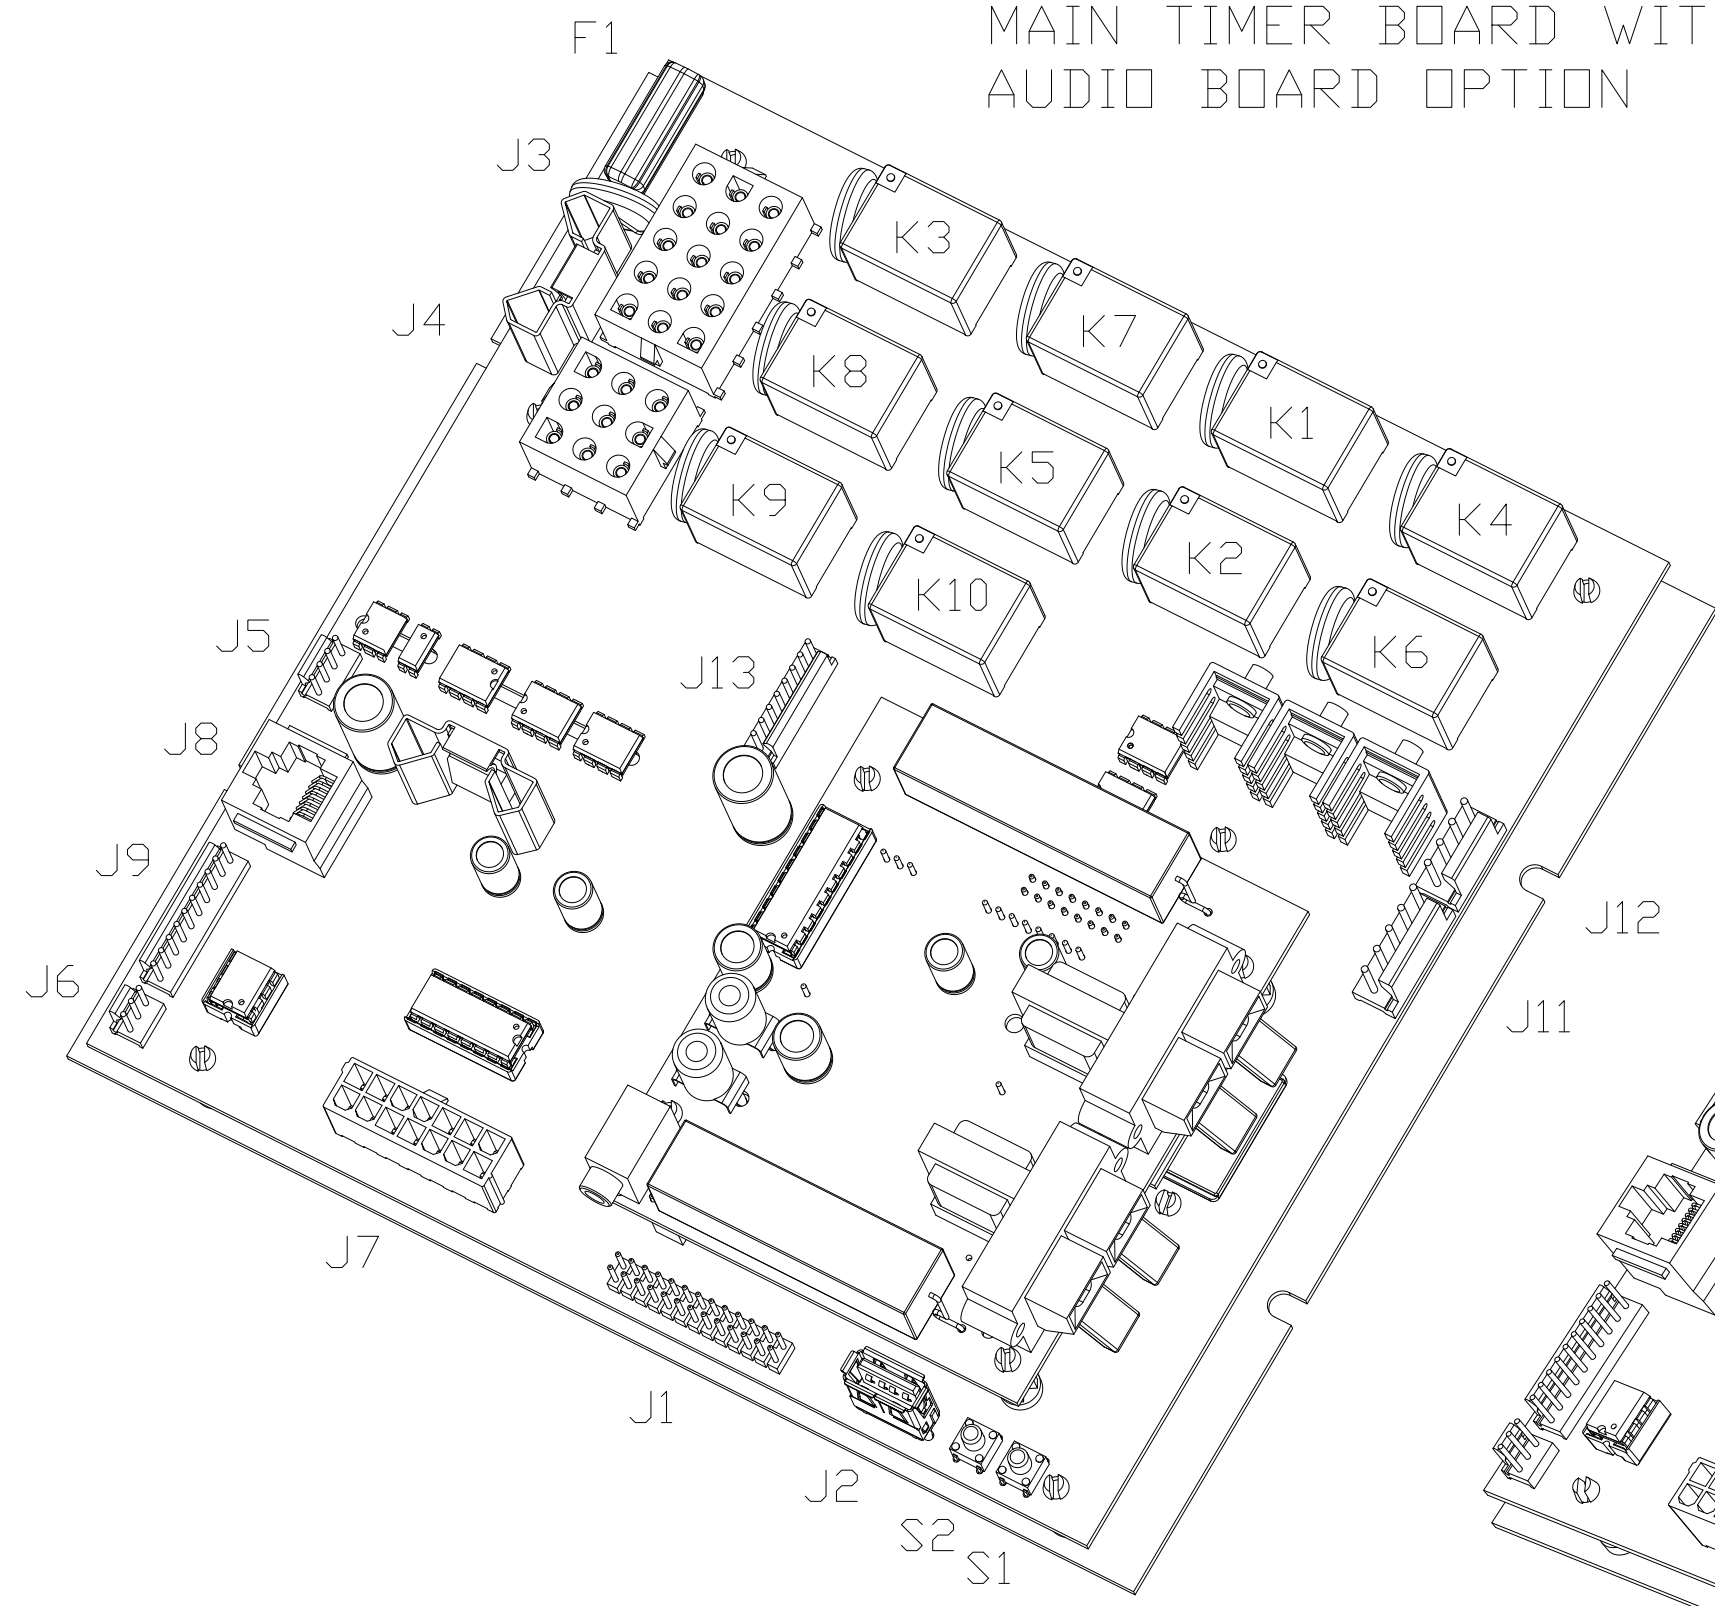









F1 = 10A/250VAC
5x20mm FUSE



J2 = USB THUMB DRIVE
JACK

30324-01, REV A 442-3F TIMER PCB HEADERS

MAIN TIMER BOARD HEADERS

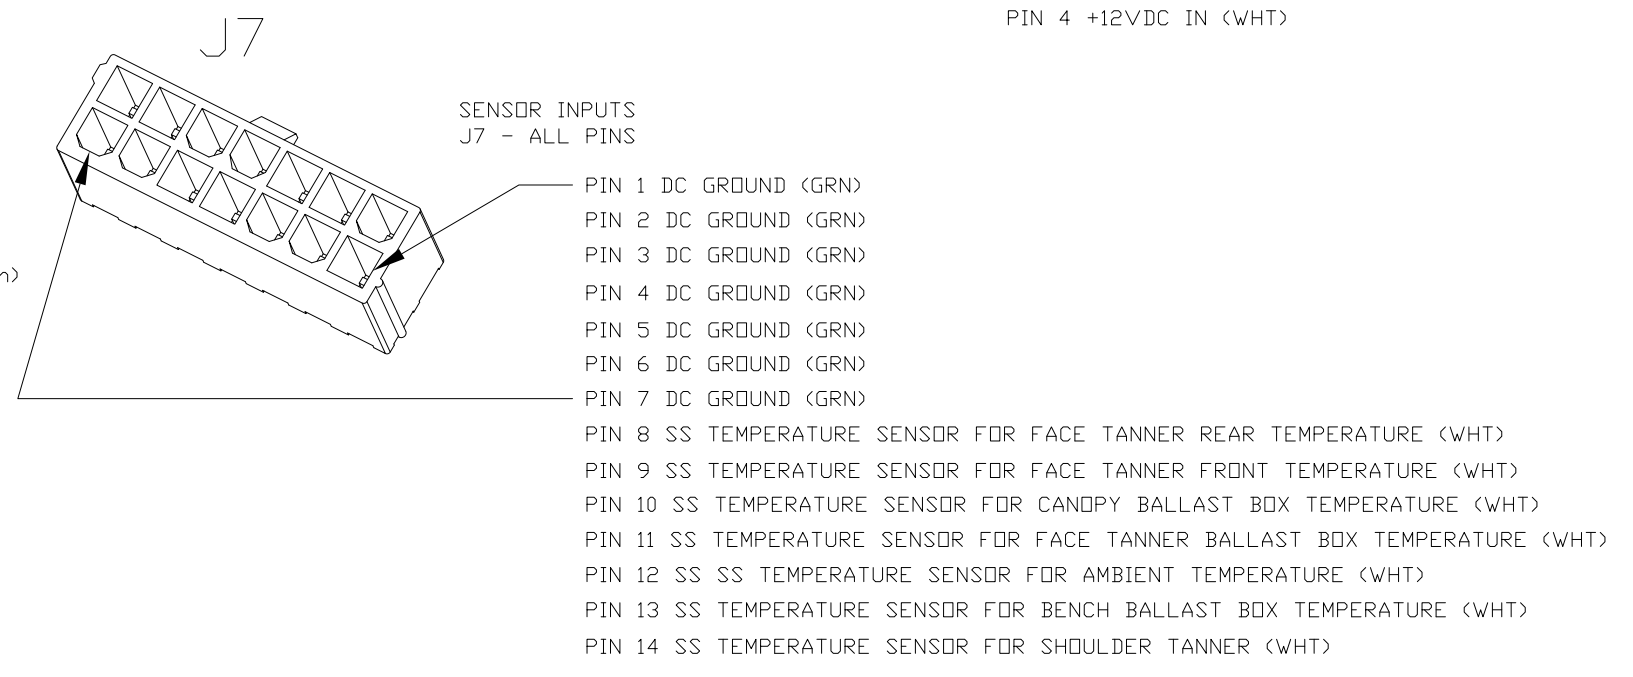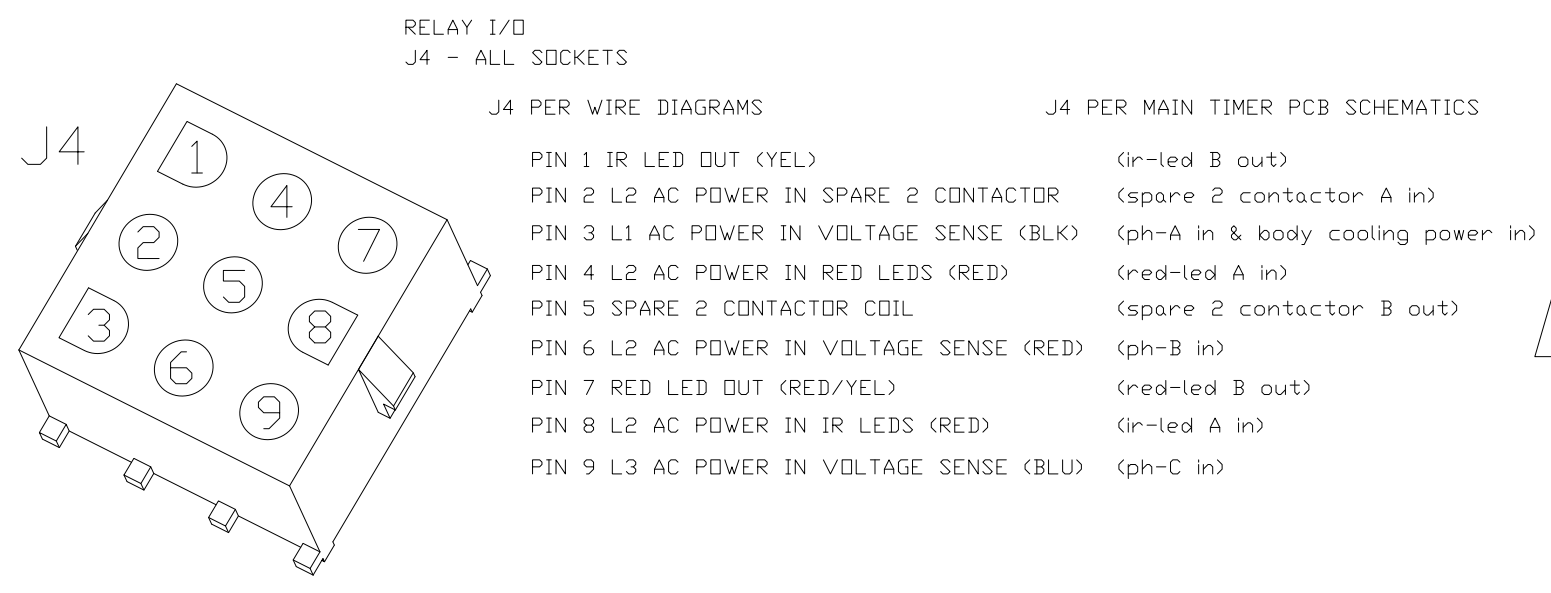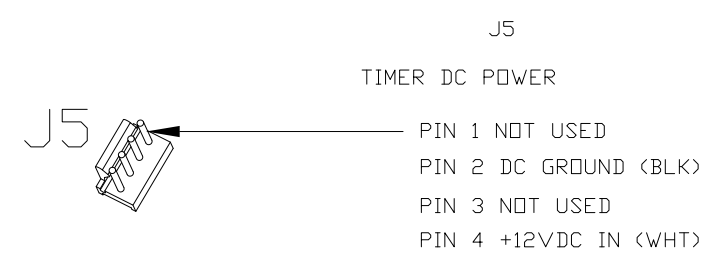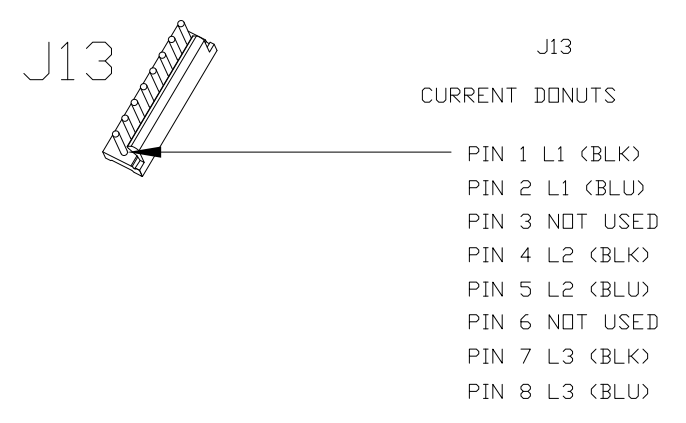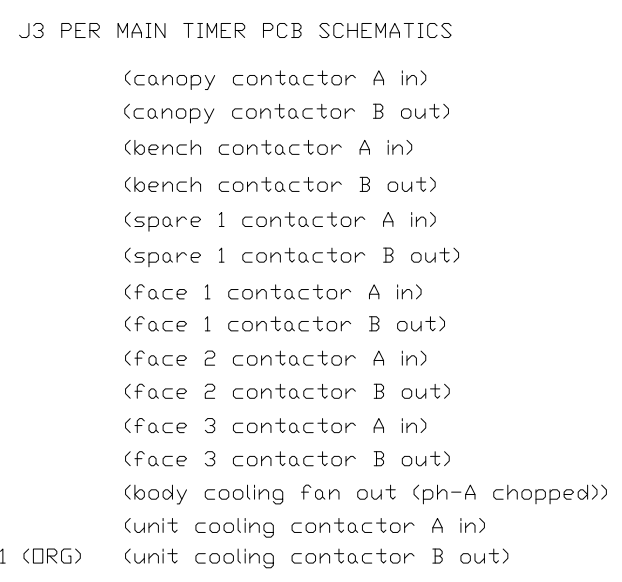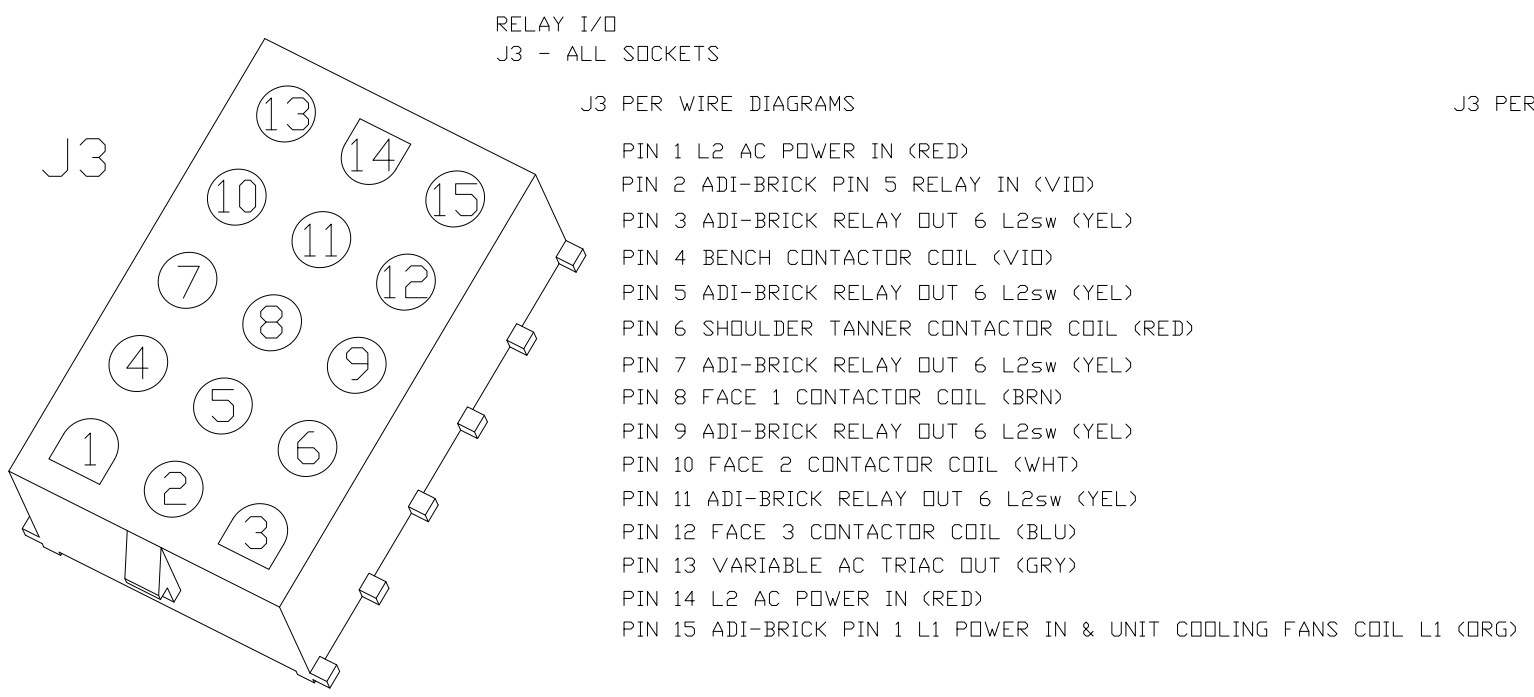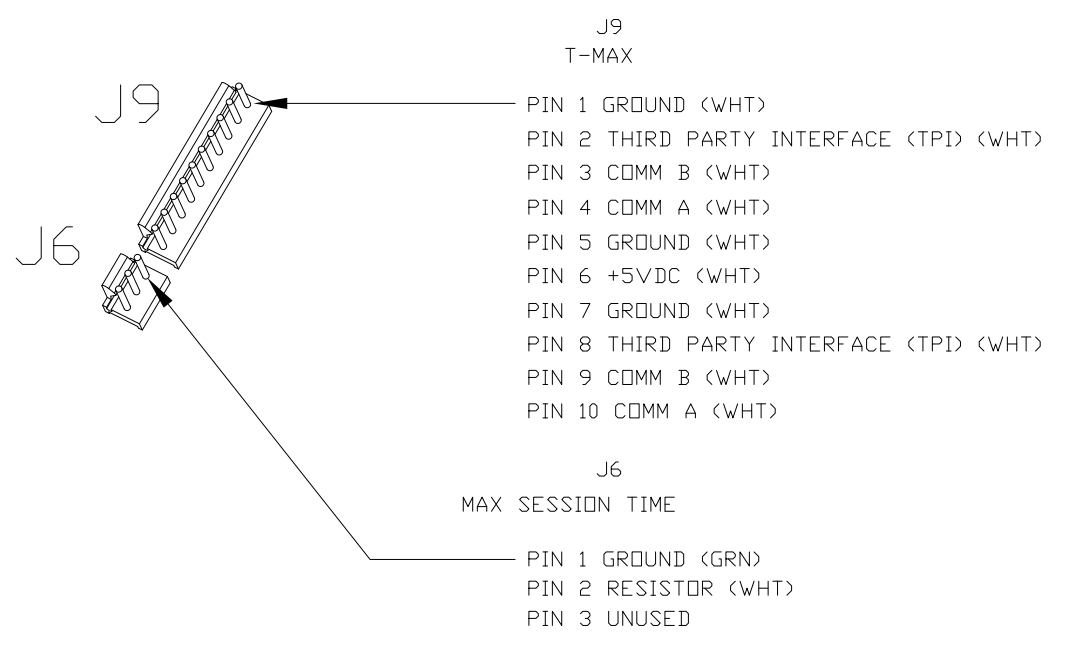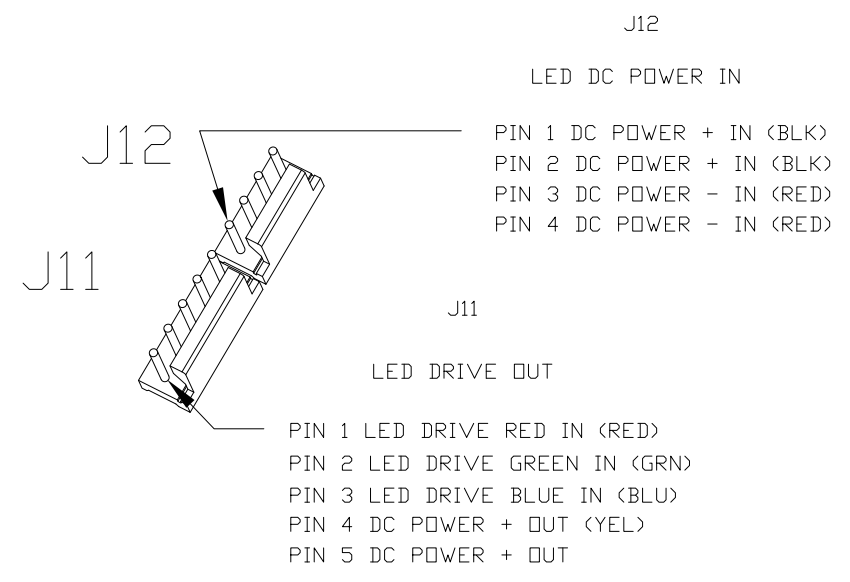


30325-01, REV A
442-3F CONTACTOR BOX

FOOT END

FRONT OF BED


BACK OF BED

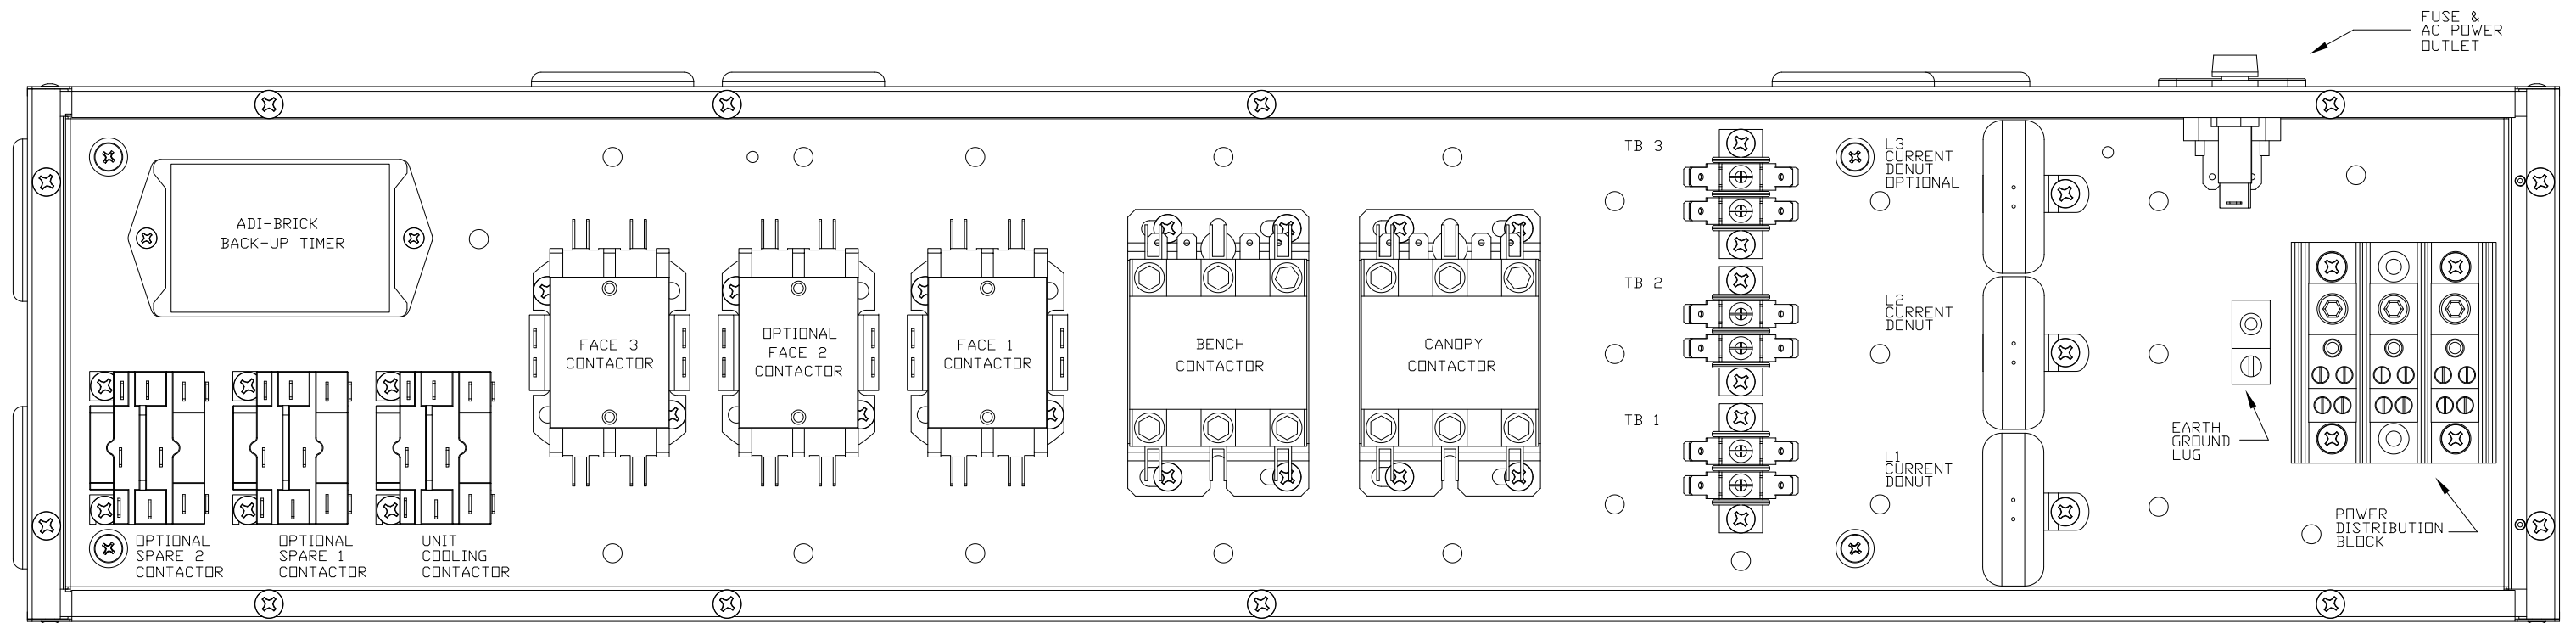

30325-01, REV A
442-3F TIMER BOX
FOOT END

FRONT OF BED


BACK OF BED

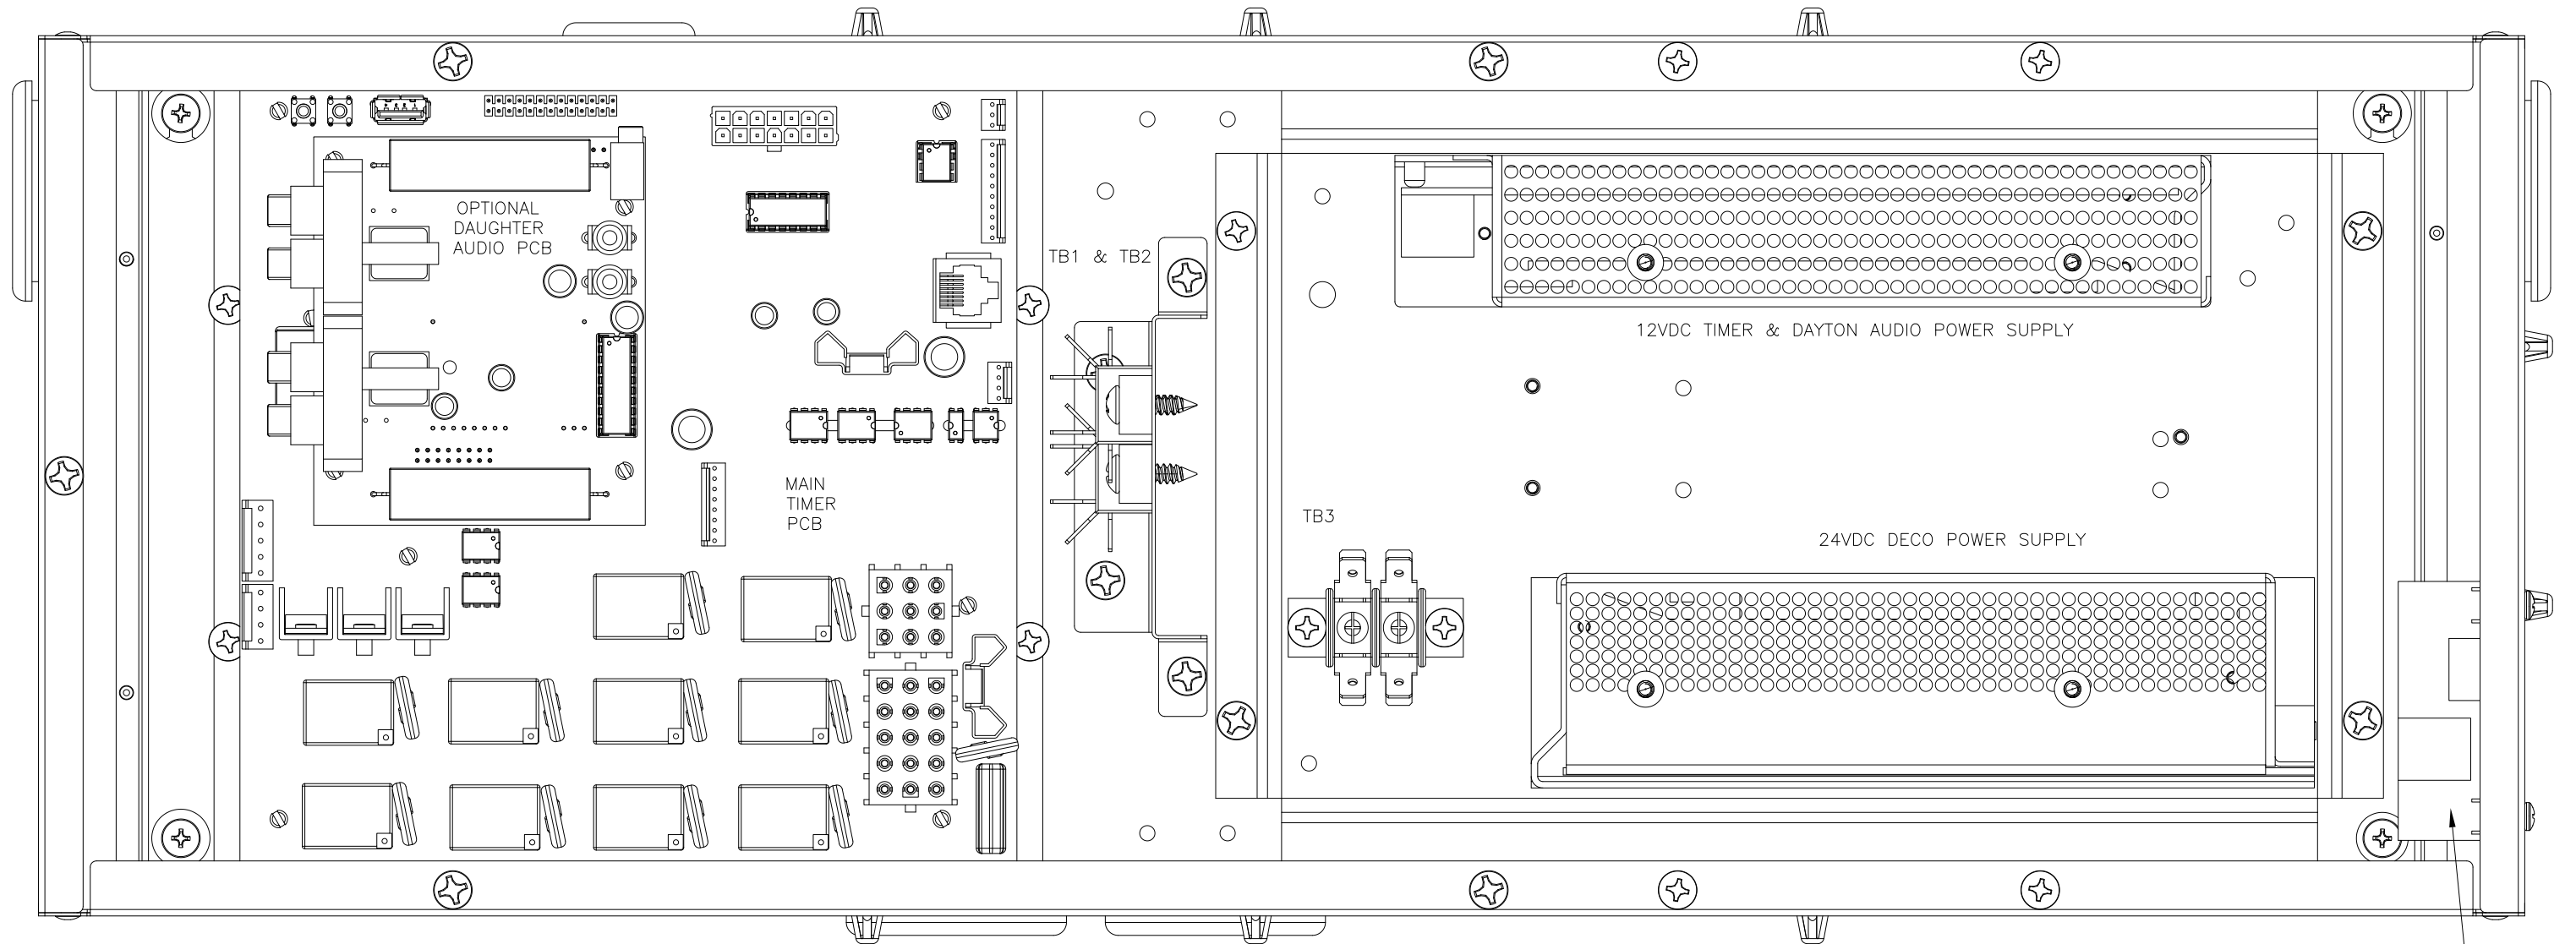

RJ-45 TO
RJ-45
FEED THROUGH
PCB

30326-01,
REV A

442-3F SECTION OF THE BACK PANEL

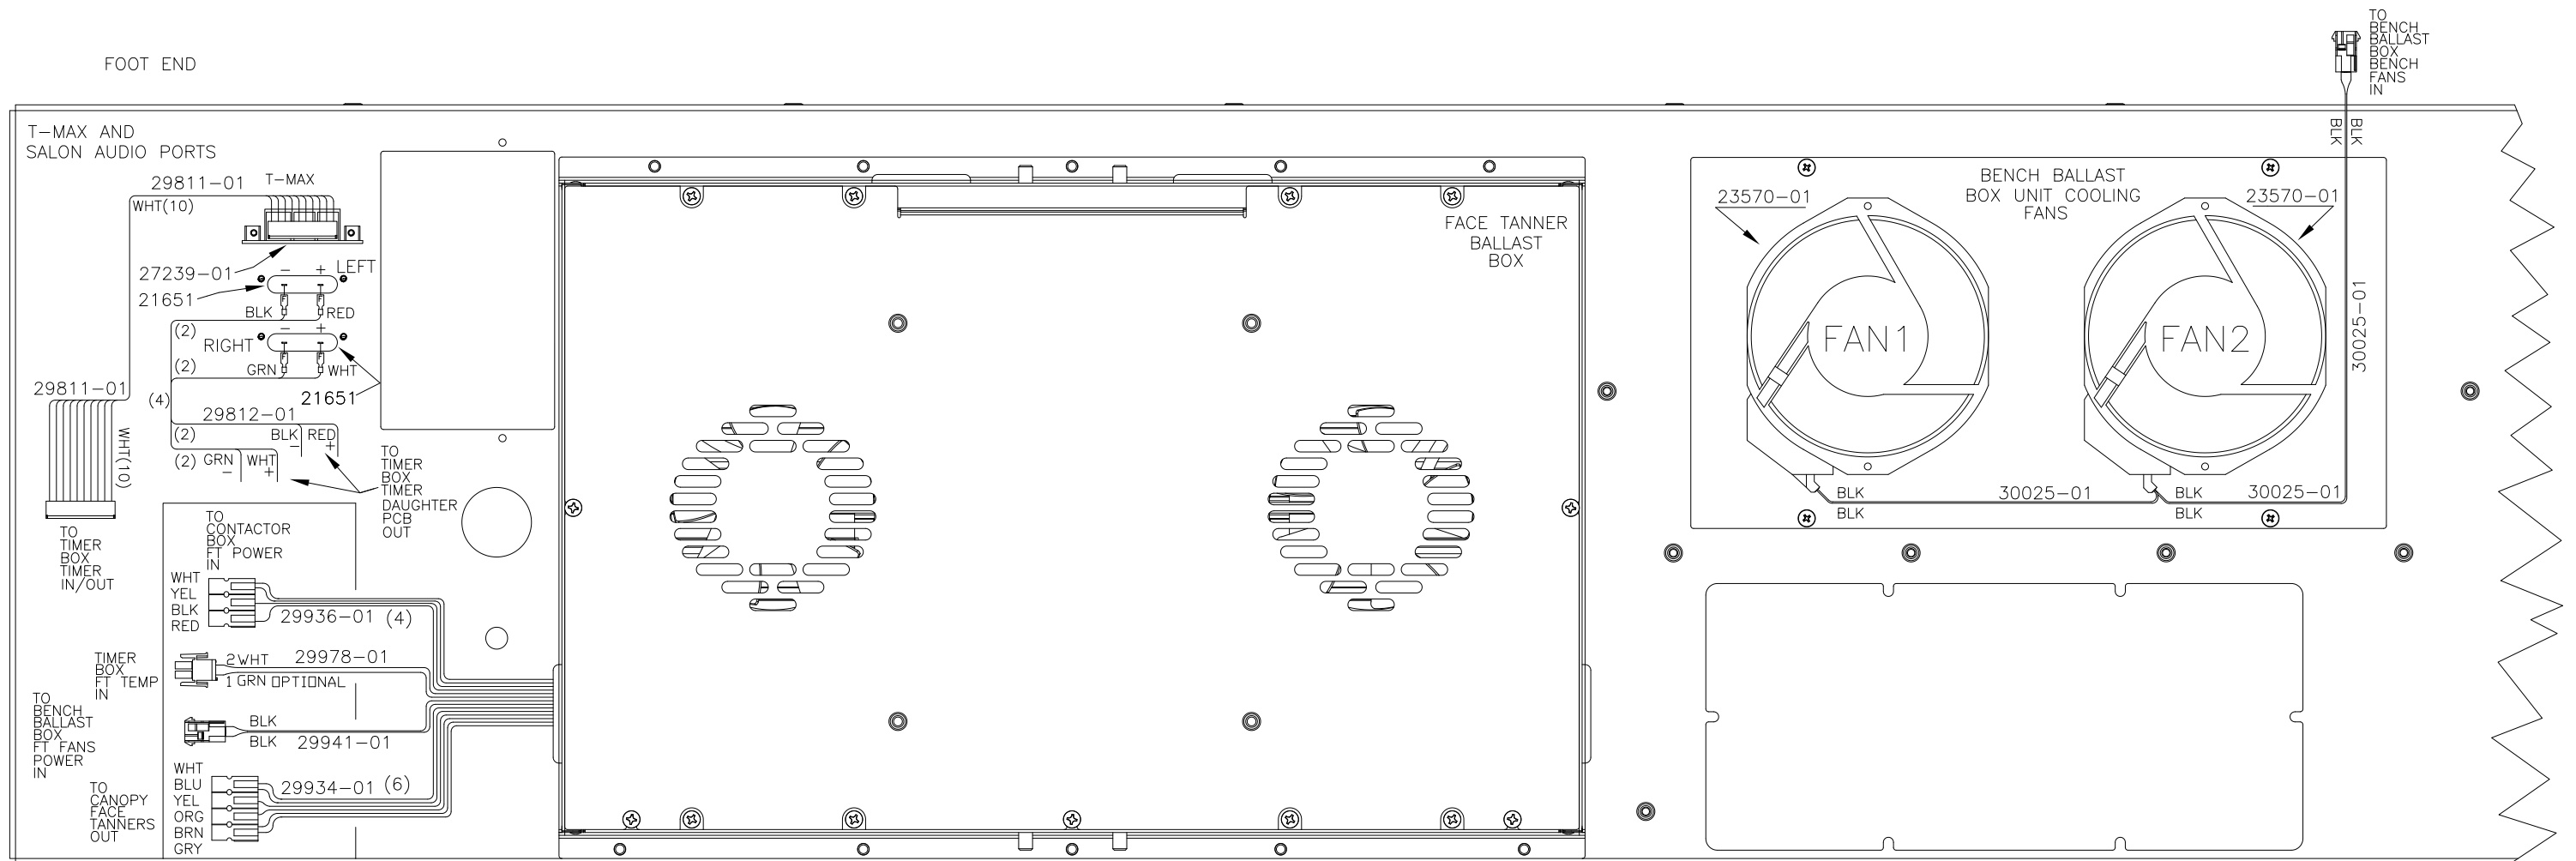

30327-01, REV A 442-3F WHOLE AUDIO SYSTEM OPTIONS

DAYTON AUDIO AMP CONFIGURATION SYSTEM WIDE

