

**Subject:** How To Remove A Cover - Residential

**Number:** SRV0019


**Applicability:** All SunQuest beds except 1000S, 2000S and 3000S, Sunvision 24S, 28LE, And similar private labelled units

**Date:** 3/20/2006

**Overview:** This procedure covers many models, but all have the same basic, 35" wide frame. The unit you are working on may vary slightly from the images shown. The procedure remains largely the same for units produced since before 1997. Proceed carefully and avoid pulling any wiring. **Always disconnect power before removing any protective covers.**


**Procedure:** Canopy Cover

1. Use flat, blunt object (such as a putty knife) to pry trim strip off front and back of tanning bed as shown at left.
2. Remove timer from front:
  - a. **Mechanical timer**
    - i. Pull timer knob off (black pointer knob has set screw).
    - ii. Remove the two screws holding the bezel to the bracket inside the bed.
    - iii. On R-model beds and newer, disconnect wire harness from timer. Older beds can leave the timer connected.
  - b. **Digital timer**
    - i. Remove the two screws holding the timer to the bracket inside the bed.
    - ii. Pull timer out and disconnect wiring harnesses.
3. Lift cover carefully, bending slightly in the middle to slide out of endcaps. (NOTE: canopy will lift when cover is removed)
4. If cover has control key switch attached, disconnect wires from switch.
5. If you are replacing cover, unscrew control key switch from cover.
6. Slide power cords through hole in back of cover.
7. To install cover, slip one end into endcap, flex cover slightly in the middle and slip other end into other endcap. Then reverse the above directions to reassemble canopy.

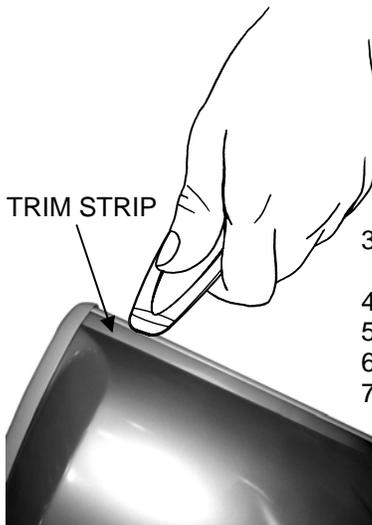

TRIM STRIP

TRIM STRIP REMOVAL

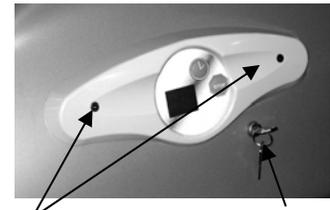

TIMER SCREWS

CONTROL KEY SWITCH

Bench Cover

1. After disassembling unit to remove canopy, turn bench upside-down and remove legs.
2. Use flat, blunt object (putty knife) to pry trim strip off front and back.
3. Lift cover carefully, bending slightly in the middle to slide out of endcaps.
4. Slide power cords through hole in back of cover.
5. Reverse directions to install cover.

**NOTICE:** This document and the information disclosed herein are proprietary data of ETS, Inc. Neither this document nor the information contained herein shall be used, reproduced, or disclosed to others without the written authorization of ETS, Inc. except to the extent required for installation or maintenance of the recipient's equipment.

**CAUTION:** ETS, Inc. Service Bulletins are intended for use by experienced service technicians. They are written to inform those technicians of conditions that may occur in some equipment, or to provide information that could assist in the proper servicing of the equipment. If a condition is described, DO NOT assume that this service bulletin must be applied to your equipment, or that your equipment will develop that condition. Always consult your ETS, Inc. Technical Service Representative before performing any modifications to your equipment. When electrical service is needed, we recommend hiring a professional electrician.